

TOUGHLIQUID 240 EX Pro ARGB Sync

PN : CL-W418-PL00BL-A

TOUGHLIQUID 240 EX Pro

ARGB Sync
All-In-One Liquid Cooler



TT thermaltake

TOUGHLIQUID 240 EX Pro ARGB Sync

Features

- Fulfill INTEL latest 14th Gen K Series CPU thermal demand
- Equipped with TOUGHFAN EX12/14 Pro fans for best cooling performance
- MagForce 2.0, a new Magnetic Connection Design for optimized fan daisy-chaining
- Industrial Style Water Block Design featuring Infinity-mirror lighting effects
- Rotatable Upper Cap Design on the water block for the best aesthetics
- Universal Socket Compatibility for both Intel and AMD Platform



Specification

*** Requires Motherboard Sync for ARGB lighting effect**

Compatibility (CPU Socket)		Intel LGA 2066/2011/1700/1200/1156/1155/1151/1150 AMD AM5/AM4/AM3+/AM3/AM2+/AM2
Water Block	Material	Copper
Pump	Speed	PWM 1500~3300 R. P. M
	Rated Voltage	12 V & 5V
	Rated Current	0.43 A & 0.32 A
	Power Input	5.16 W & 1.6 W
	Connector	2510-4 Pin / 5V ARGB header-3 Pin
Fan	Dimension	120 x 120 x 25 mm
	Speed	PWM 500~2000 R. P. M
	Noise Level	22.6 dB-A
	Rated Voltage	12 V
	Rated Current	0.17 A (one fan)
	Power Input	2.04 W (one fan)
	Max. Air Flow	70.8 CFM
	Max. Static Pressure	3.19 mm-H2O
	Connector	2510 - 4 Pin PWM
	Bearing Type	Hydraulic Bearing Gen. 2
Life expectation	40,000 hrs, 25°C	
Radiator	Dimension	276 x 120 x 27 mm
	Material	Aluminum
Tube	Length	460 mm
	Material	Rubber

TOUGHLIQUID 240 EX Pro ARGB Sync


• Angle View



Infinity-Mirror lighting effects



High Performance Water Block

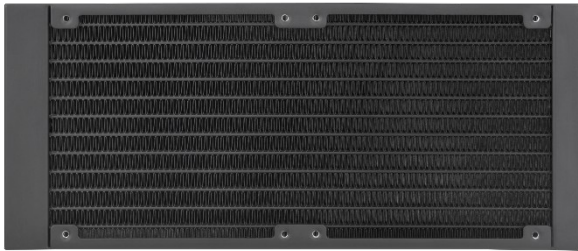


High Efficiency Radiator



Powerful Cooling Fan



MagForce 2.0

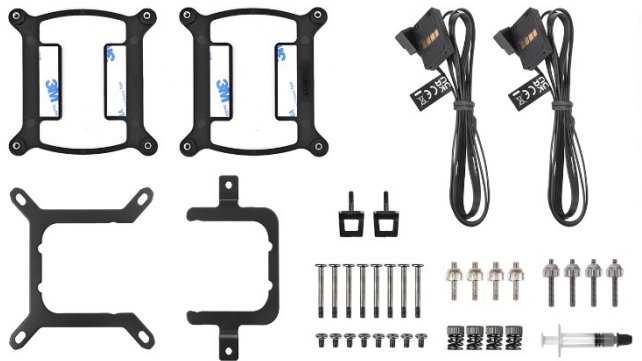

Universal Socket Compatible

TOUGHLIQUID 360 EX Pro ARGB Sync

PN : CL-W400-PL00BL-A

TOUGHLIQUID 360 EX Pro

ARGB Sync
All-In-One Liquid Cooler



TT thermaltake

TOUGHLIQUID 360 EX Pro ARGB Sync

Features

- Fulfill INTEL latest 14th Gen K Series CPU thermal demand
- Equipped with TOUGHFAN EX12/14 Pro fans for best cooling performance
- MagForce 2.0, a new Magnetic Connection Design for optimized fan daisy-chaining
- Industrial Style Water Block Design featuring Infinity-mirror lighting effects
- Rotatable Upper Cap Design on the water block for the best aesthetics
- Universal Socket Compatibility for both Intel and AMD Platform



Specification

*** Requires Motherboard Sync for ARGB lighting effect**

Compatibility (CPU Socket)		Intel LGA 2066/2011/1700/1200/1156/1155/1151/1150 AMD AM5/AM4/AM3+/AM3/AM2+/AM2
Water Block	Material	Copper
Pump	Speed	PWM 1500~3300 R. P. M
	Rated Voltage	12 V & 5V
	Rated Current	0.43 A & 0.32 A
	Power Input	5.16 W & 1.6 W
	Connector	2510-4 Pin / 5V ARGB header-3 Pin
Fan	Dimension	120 x 120 x 25 mm
	Speed	PWM 500~2000 R. P. M
	Noise Level	22.6 dB-A
	Rated Voltage	12 V
	Rated Current	0.17 A (one fan)
	Power Input	2.04 W (one fan)
	Max. Air Flow	70.8 CFM
	Max. Static Pressure	3.19 mm-H2O
	Connector	2510 - 4 Pin PWM
	Bearing Type	Hydraulic Bearing Gen. 2
Life expectation	40,000 hrs, 25°C	
Radiator	Dimension	396 x 120 x 27 mm
	Material	Aluminum
Tube	Length	460 mm
	Material	Rubber

TOUGHLIQUID 360 EX Pro ARGB Sync


• Angle View



Infinity-Mirror lighting effects



High Performance Water Block

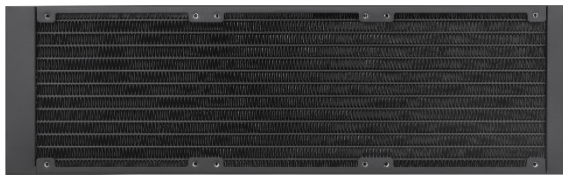

High Efficiency Radiator



Powerful Cooling Fan



MagForce 2.0



Universal Socket Compatible

TOUGHLIQUID 280 EX Pro ARGB Sync

PN : CL-W419-PL00BL-A

TOUGHLIQUID

280 EX Pro

ARGB Sync

All-In-One Liquid Cooler



thermaltake

TOUGHLIQUID 280 EX Pro ARGB Sync

Features

- Fulfill INTEL latest 14th Gen K Series CPU thermal demand
- Equipped with TOUGHFAN EX12/14 Pro fans for best cooling performance
- MagForce 2.0, a new Magnetic Connection Design for optimized fan daisy-chaining
- Industrial Style Water Block Design featuring Infinity-mirror lighting effects
- Rotatable Upper Cap Design on the water block for the best aesthetics
- Universal Socket Compatibility for both Intel and AMD Platform



Specification

*** Requires Motherboard Sync for ARGB lighting effect**

Compatibility (CPU Socket)		Intel LGA 2066/2011/1700/1200/1156/1155/1151/1150 AMD AM5/AM4/AM3+/AM3/AM2+/AM2
Water Block	Material	Copper
Pump	Speed	PWM 1500~3300 R. P. M
	Rated Voltage	12 V & 5V
	Rated Current	0.43 A & 0.32 A
	Power Input	5.16 W & 1.6 W
	Connector	2510-4 Pin / 5V ARGB header-3 Pin
Fan	Dimension	140 x 140 x 25 mm
	Speed	PWM 500~2000 R. P. M
	Noise Level	31.6 dB-A
	Rated Voltage	12 V
	Rated Current	0.3 A (one fan)
	Power Input	3.6 W (one fan)
	Max. Air Flow	119.6 CFM
	Max. Static Pressure	3.57 mm-H2O
	Connector	2510 - 4 Pin PWM
	Bearing Type	Hydraulic Bearing Gen. 2
Life expectation	40,000 hrs, 25°C	
Radiator	Dimension	456 x 139 x 27 mm
	Material	Aluminum
Tube	Length	460 mm
	Material	Rubber

TOUGHLIQUID 280 EX Pro ARGB Sync


• Angle View



Infinity-Mirror lighting effects



High Performance Water Block

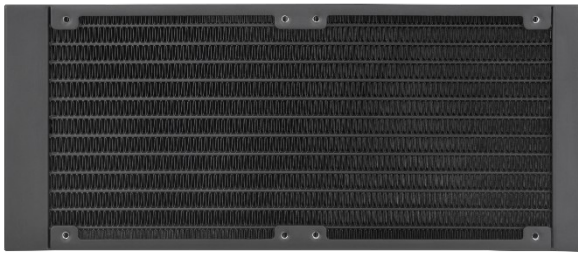


High Efficiency Radiator



Powerful Cooling Fan



MagForce 2.0

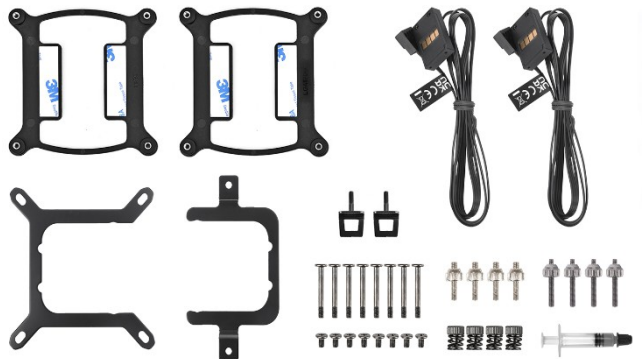

Universal Socket Compatible

TOUGHLIQUID 420 EX Pro ARGB Sync

PN : CL-W401-PL00BL-A

TOUGHLIQUID 420 EX Pro

ARGB Sync
All-In-One Liquid Cooler



TT thermaltake

TOUGHLIQUID 420 EX Pro ARGB Sync

Features

- Fulfill INTEL latest 14th Gen K Series CPU thermal demand
- Equipped with TOUGHFAN EX12/14 Pro fans for best cooling performance
- MagForce 2.0, a new Magnetic Connection Design for optimized fan daisy-chaining
- Industrial Style Water Block Design featuring Infinity-mirror lighting effects
- Rotatable Upper Cap Design on the water block for the best aesthetics
- Universal Socket Compatibility for both Intel and AMD Platform



Specification

*** Requires Motherboard Sync for ARGB lighting effect**

Compatibility (CPU Socket)		Intel LGA 2066/2011/1700/1200/1156/1155/1151/1150 AMD AM5/AM4/AM3+/AM3/AM2+/AM2
Water Block	Material	Copper
Pump	Speed	PWM 1500~3300 R. P. M
	Rated Voltage	12 V & 5V
	Rated Current	0.43 A & 0.32 A
	Power Input	5.16 W & 1.6 W
	Connector	2510-4 Pin / 5V ARGB header-3 Pin
Fan	Dimension	140 x 140 x 25 mm
	Speed	PWM 500~2000 R. P. M
	Noise Level	31.6 dB-A
	Rated Voltage	12 V
	Rated Current	0.3 A (one fan)
	Power Input	3.6 W (one fan)
	Max. Air Flow	119.6 CFM
	Max. Static Pressure	3.57 mm-H2O
	Connector	2510 - 4 Pin PWM
	Bearing Type	Hydraulic Bearing Gen. 2
Life expectation	40,000 hrs, 25°C	
Radiator	Dimension	276 x 139 x 27 mm
	Material	Aluminum
Tube	Length	460 mm
	Material	Rubber

TOUGHLIQUID 420 EX Pro ARGB Sync


• Angle View



Infinity-Mirror lighting effects



High Performance Water Block

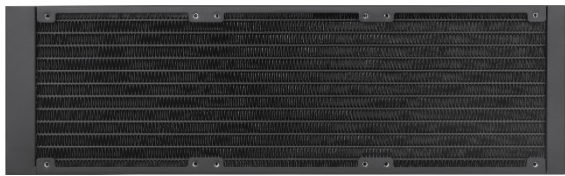

High Efficiency Radiator



Powerful Cooling Fan



MagForce 2.0



Universal Socket Compatible

TOUGHLIQUID EX Pro ARGB Sync All-In-One Liquid Cooler

- **Appearance**

*** Requires Motherboard Sync for ARGB lighting effect**



Special LED Water Block Design

Sync MB lighting control



MagForce 2.0

optimized fan daisy-chaining



Application

TOUGHLIQUID EX Pro ARGB Sync All-In-One Liquid Cooler

- 5V Sync

Support ASUS、MSI、GIGABYTE and ASROCK 5V RGB motherboard Sync.

***Caution: the motherboard signal connector only supports 5V header.**



Aura Addressable Header



Digital Pin Header



JRAINBOW Header



Addressable RGB LED Header

TOUGHLIQUID EX Pro ARGB Sync All-In-One Liquid Cooler

TOUGHLIQUID EX Pro **Series** **ARGB Sync** **All-In-One Liquid Cooler**

